

DELTA®-DRY & LATH meets Acceptance Criteria for Moisture Drainage Systems Used with Exterior Cement Plaster or Adhered Veneer Walls (AC356) and Acceptance Criteria for Glass Fiber Lath in Cementitious Exterior Wall Coating or Exterior Cement Plaster (Stucco) (AC275). IAPMO UES ER-323.

For proper performance of DELTA®-DRY ensure top and bottom remain open to allow ventilation and drainage


SUBSTANTIAL EFFORT HAS BEEN MADE TO ENSURE THAT THE INFORMATION IN THIS DETAIL DRAWING IS ACCURATE. DÖRKEN SYSTEMS INC. CANNOT ACCEPT RESPONSIBILITY FOR ANY ERRORS OR OVERSIGHTS IN THE USE OF THIS MATERIAL OR IN THE PREPARATION OF ARCHITECTURAL OR ENGINEERING PLANS. THE DESIGN PROFESSIONAL MUST RECOGNIZE THAT NO DESIGN DETAIL CAN SUBSTITUTE FOR EXPERIENCED ENGINEERING AND PROFESSIONAL JUDGEMENT.

TITLE:

DELTA®-DRY & LATH WITH EXTERIOR INSULATION TYPICAL BASE OF WALL AT FOUNDATION

DRAWN BY: DÖRKEN SYSTEMS INC. KRZYSZTOF APRIASZ C. Tech. CPHC[®]



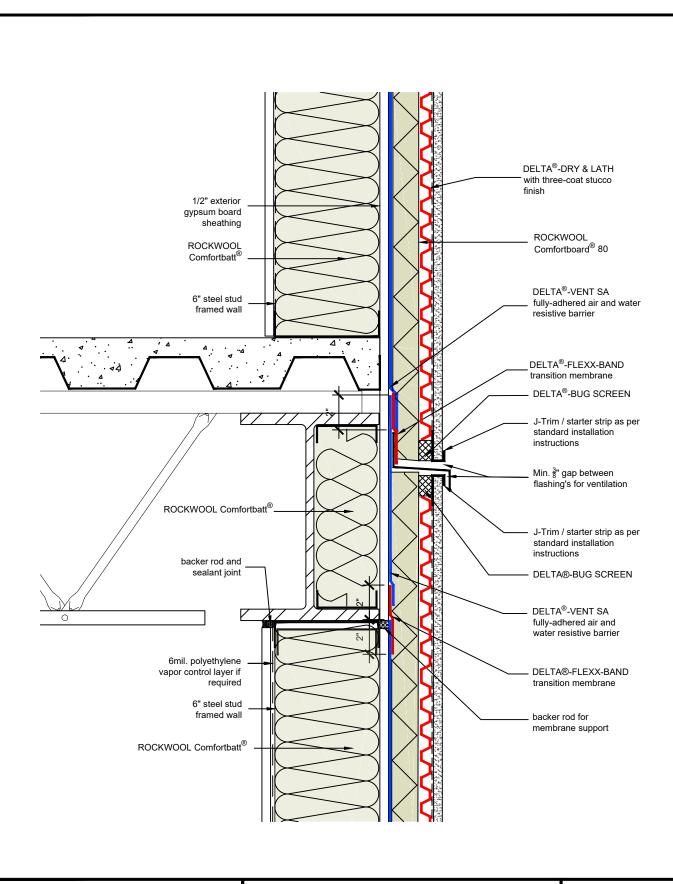


TITLE:

DELTA[®]-DRY & LATH TYPICAL VENTILATION DETAIL

DRAWN BY: DÖRKEN SYSTEMS INC. KRZYSZTOF APRIASZ C. Tech. CPHC®



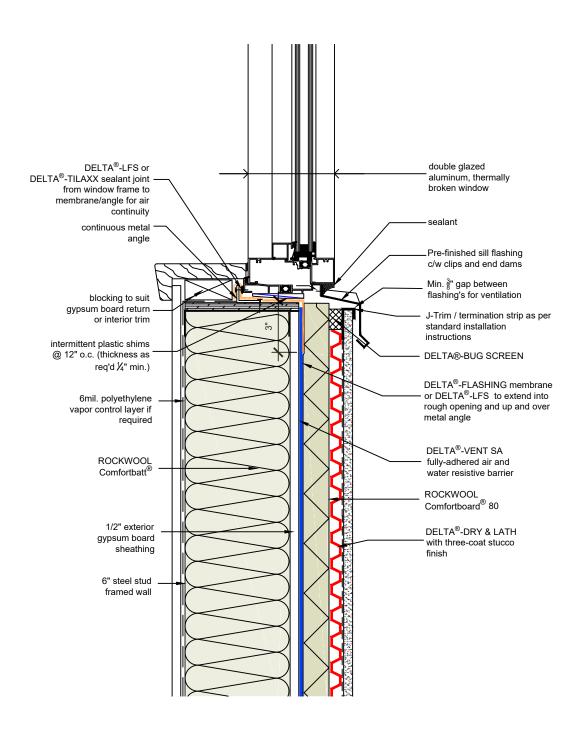


TITLE:

DELTA®-DRY & LATH WITH EXTERIOR INSULATION TYPICAL PUNCHED WINDOW JAMB

DRAWN BY: DÖRKEN SYSTEMS INC. KRZYSZTOF APRIASZ C. Tech. CPHC®




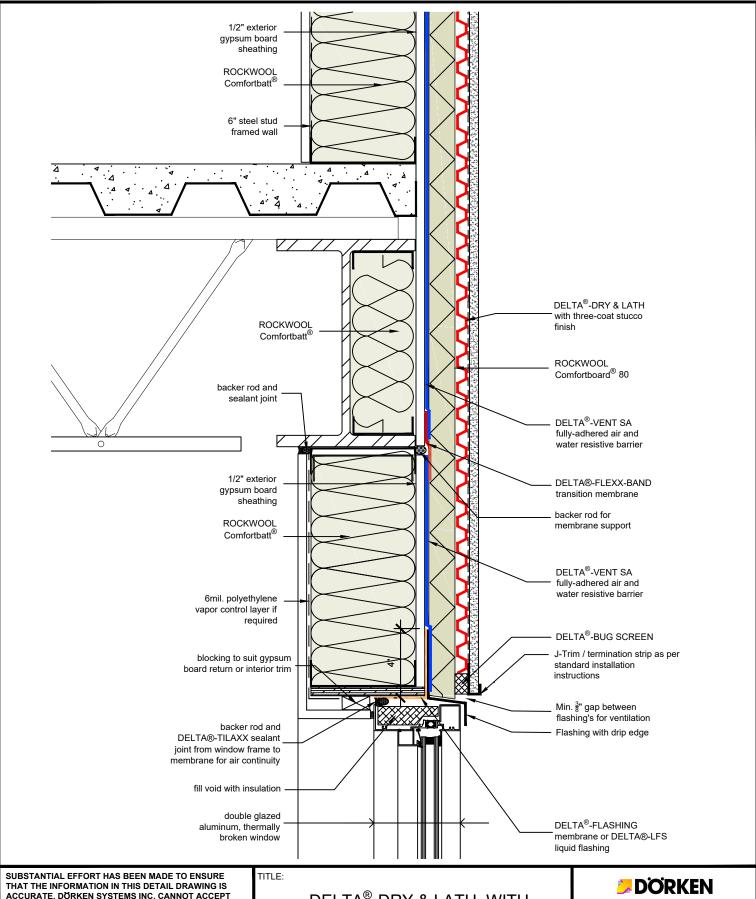

DELTA®-DRY & LATH WITH EXTERIOR INSULATION TYPICAL PUNCHED WINDOW HEAD

DRAWN BY: DÖRKEN SYSTEMS INC. KRZYSZTOF APRIASZ C. Tech. CPHC®



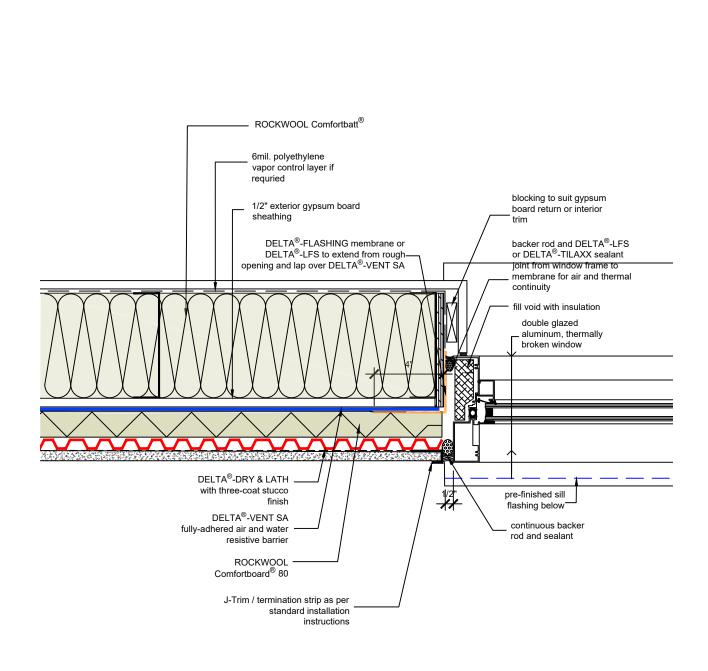


TITLE:

DELTA®-DRY & LATH WITH EXTERIOR INSULATION TYPICAL PUNCHED WINDOW JAMB

DRAWN BY: DÖRKEN SYSTEMS INC. KRZYSZTOF APRIASZ C. Tech. CPHC®



L3J 0T4 CANADA

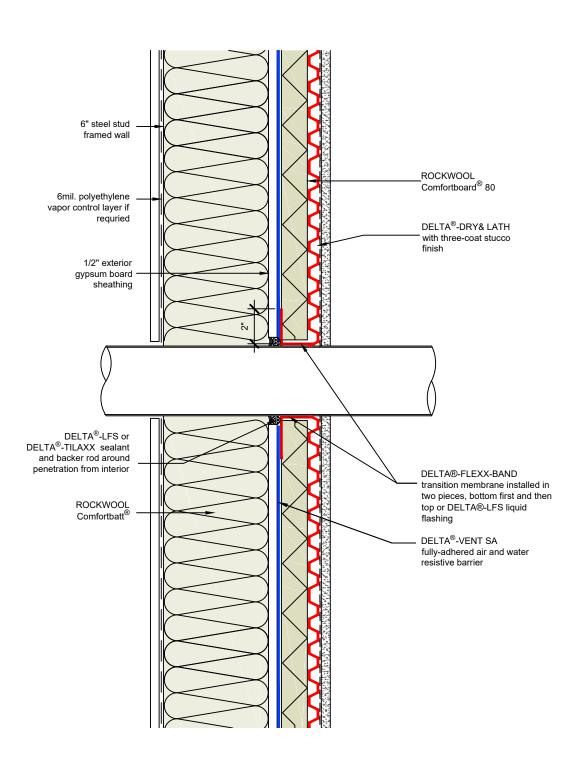


TITLE:

DELTA®-DRY & LATH WITH EXTERIOR INSULATION TYPICAL PENETRATION

DRAWN BY: DÖRKEN SYSTEMS INC. KRZYSZTOF APRIASZ C. Tech. CPHC®





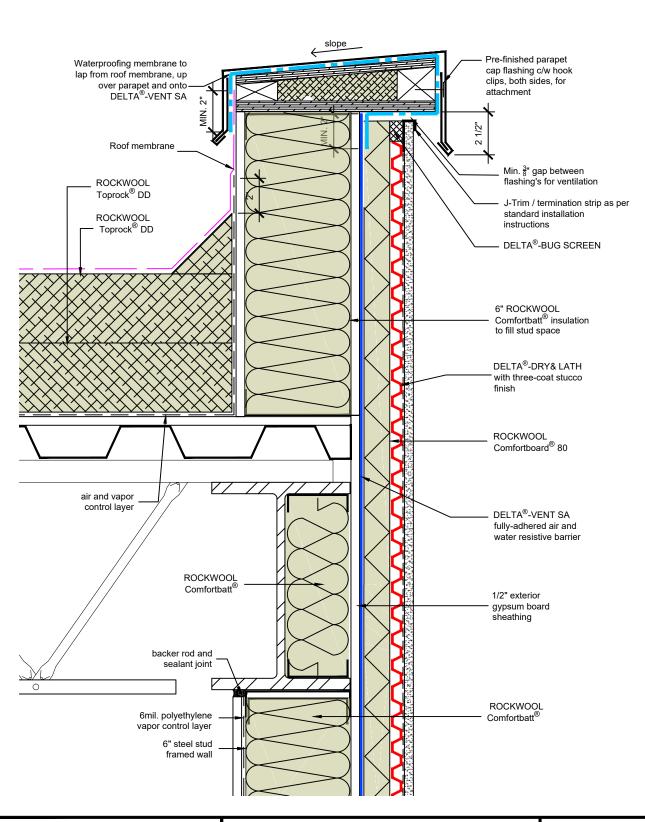

TITLE:

DELTA[®]-DRY & LATH WITH EXTERIOR INSULATION TYPICAL ROOF TO WALL SECTION

DRAWN BY: DÖRKEN SYSTEMS INC. KRZYSZTOF APRIASZ C. Tech. CPHC®

